

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

www.bartec.nt-rt.ru || bct@nt-rt.ru

Взрывозащищенные удаленные станции (мониторы)

Process Monitor PM 420ex



Process Monitor PM 420^{ex}



Process Monitor PM 420^{ex}

Features

- Version in Ex i
- Five-digit transreflective graphics display
- No additional voltage supply needed
- Bar graph capability


Description

The process monitor is a 5-digit intrinsically safe display unit.


It can be used to show electricity flowing out of a 4 mA... 20 mA field circuit into technical units.

No additional voltage supply or battery is needed for operation.

Mounting

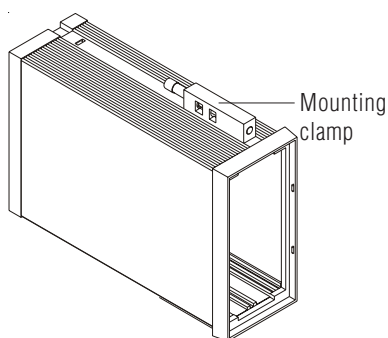

Dimensions/mounting positions

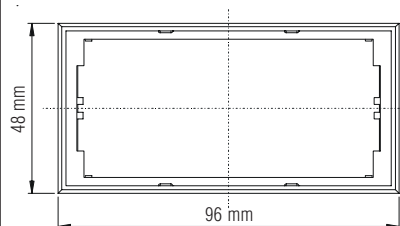

Depth: 82 mm

Input mode unit			
Parameter	Unit	Parameter	Unit
0	°C	13	t
1	A	14	pH
2	mA	15	ppm
3	V	16	rpm
4	mV	17	mbar
5	n	18	bar
6	mm	19	kPa
7	cm	20	1/min
8	m	21	μS/cm
9	km	22	mS/cm
10	m ³	23	m ³ /h
11	%	24	Nm ³ /h
12	kg		

Explosion protection

Ex protection type

Ex II 2(1)G Ex ia ib IIC T5

Certification

IBExU09ATEX1095 X

Ambient temperature

-20 °C ≤ Ta ≤ +60 °C

Safety related data

U_i ≤ 30 V DC

I_i ≤ 100 mA

L_i ≤ insignificant

C_i ≤ 12 nF

Technical data

Design

front-panel fitting

Enclosure material

high-quality thermoplastics

Protection class

front installation IP 40
terminals IP 20

Display

Type height 13 mm

Connecting terminals

2,5 mm², fine-stranded

Storage temperature

-40 °C up to +80 °C

Dimensions (width x height x depth)

96 mm x 48 mm x 82 mm

Wall cut-out

91 mm x 44 mm + 0,5 mm

Weight

120 g

Electrical data

Measuring range

4...20 mA

Measured variable

Current

Error of indication

< 0.1 % of the display range

Temperature drift

< 0.01 %/K

Background lighting

on request

Order no. 17-71MM-1002

Technical data subject to change.

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

www.bartec.nt-rt.ru || bct@nt-rt.ru